

## RANGE COMPOSITION

A range of central hoods with characteristic square shape that goes well with technological hoods, as well as offering sturdiness. This shape allows the container to hold fumes before making them flow to the filters. The range consists of hoods with 6 different lengths (1200, 1600, 2000, 2400, 2800, 3200, 3600 and 4000 mm) and 2200 mm deep.



## **EXPORT - EV line - 2200 mm**

### **304 AISI CENTRAL HOODS**


**ZANUSSI**  
PROFESSIONAL

#### FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ Constructed entirely in 304 AISI stainless steel.
- ◆ Labyrinth filters in 304 AISI stainless steel easily removable for cleaning. Labyrinth filters guarantee constant filtration to avoid clogging and protect against fire.

- ◆ Powerful internal fan(s) 550 W.
- ◆ Lead hole for electric cable on top.
- ◆ Perimetral gutter with drain hole to transfer grease into a 304 AISI container.
- ◆ Blind panels in 304 AISI stainless steel for a correct exhaustion.
- ◆ The outlet holes are sized in order to minimize drops in pressure.
- ◆ Pressure gauging for perfect calibration.
- ◆ Condensate collection tray in 304 AISI stainless steel.
- ◆ Eyebolts and screw anchors for ceiling installation.
- ◆ Prearranged for installation of lighting.

TECHNICAL DATA CHARACTERISTICS	MODELS					
	ECV2220T 642382	ECV2224T 642383	ECV2228T 642384	ECV2232T 642385	ECV2236T 642386	ECV2240T 642387
External dimensions - mm						
width	2000	2400	2800	3200	3600	4000
depth	2200	2200	2200	2200	2200	2200
height	500	500	500	500	500	500
Air Capacity - mc/h	7600	7600	7600	7600	7600	7600
Net weight - kg.	82	92	102	112	121	131
<b>INCLUDED ACCESSORIES</b>						
304 S/S BLIND PANEL 400X500H MM	2				2	2
304 S/S LABYRINTH FILTER H=500 MM	8	8	10	12	12	14

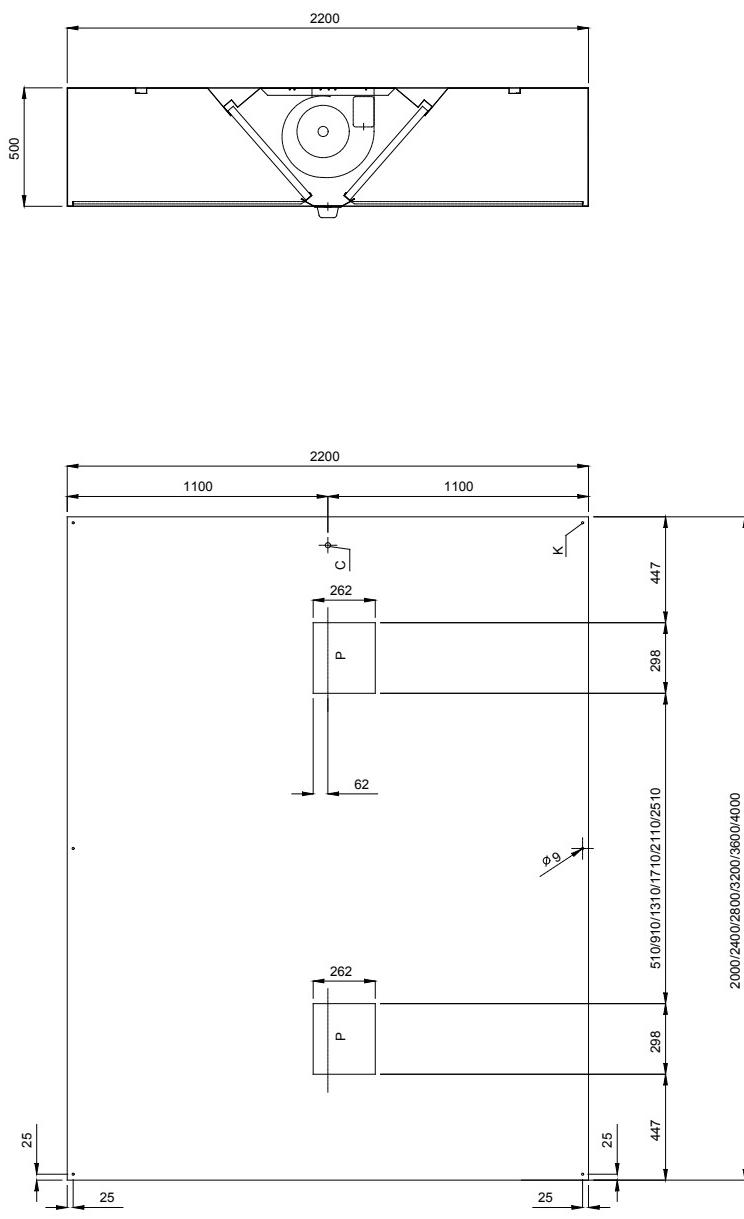

LEGEND

## OPTIONAL ACCESSORIES



---

ISO 14001



**ZANUSSI**  
**PROFESSIONAL**

[www.zanussiprofessional.com](http://www.zanussiprofessional.com)